

IMPROVEMENT PLAN STATE STREET

SCALE: 1" = 20'



CONSTRUCTION LEGEND

- HMA PAVEMENT
- CONCRETE CURB AND GUTTER, SIDEWALK, BULBOUTS, AND CURB RAMPS
- LANDSCAPING
- (N) OVERLAY TO (E) PAVEMENT CONFORM PER

LINE TABLE

LINE #	LENGTH	DIRECTION
L32	155.66	S10°37'24"E
L33	13.32	S19°22'30"W
L34	15.22	S10°37'24"E
L35	4.91	N79°22'36"E
L36	12.90	S48°57'43"W
L37	12.77	N79°22'36"E
L38	7.50	N10°37'24"W
L39	13.32	N40°37'30"W

LINE TABLE

LINE #	LENGTH	DIRECTION
L40	139.80	N10°37'24"W
L98	147.84	S10°37'24"E
L99	13.32	S40°37'30"E
L100	11.64	S10°37'24"E
L101	6.38	S79°22'30"W
L102	11.21	N70°23'10"W
L103	11.10	N48°44'52"E
L104	6.36	S79°22'36"W

LINE TABLE

LINE #	LENGTH	DIRECTION
L105	13.19	N10°37'24"W
L106	13.32	N19°22'30"E
L107	141.24	N10°37'24"W

CURVE TABLE


CURVE #	LENGTH	RADIUS	DELTA
C34	2.62	5.00	29°59'54"
C35	2.62	5.00	29°59'54"
C36	15.71	10.00	90°00'00"
C37	2.65	5.00	30°24'46"
C38	2.62	5.00	30°00'00"
C39	15.71	10.00	90°00'00"
C40	2.62	5.00	30°00'06"
C41	2.62	5.00	30°00'06"

CURVE TABLE

CURVE #	LENGTH	RADIUS	DELTA
C98	2.62	5.00	29°59'54"
C99	2.62	5.00	30°00'06"
C100	2.62	5.00	30°00'06"
C101	15.71	10.00	90°00'00"
C102	2.64	5.00	30°14'20"
C103	2.62	5.00	30°00'00"
C104	2.62	5.00	30°00'00"
C105	2.67	5.00	30°37'38"

CURVE TABLE

CURVE #	LENGTH	RADIUS	DELTA
C106	15.71	10.00	90°00'00"
C107	2.62	5.00	29°59'54"
C108	2.62	5.00	29°59'54"

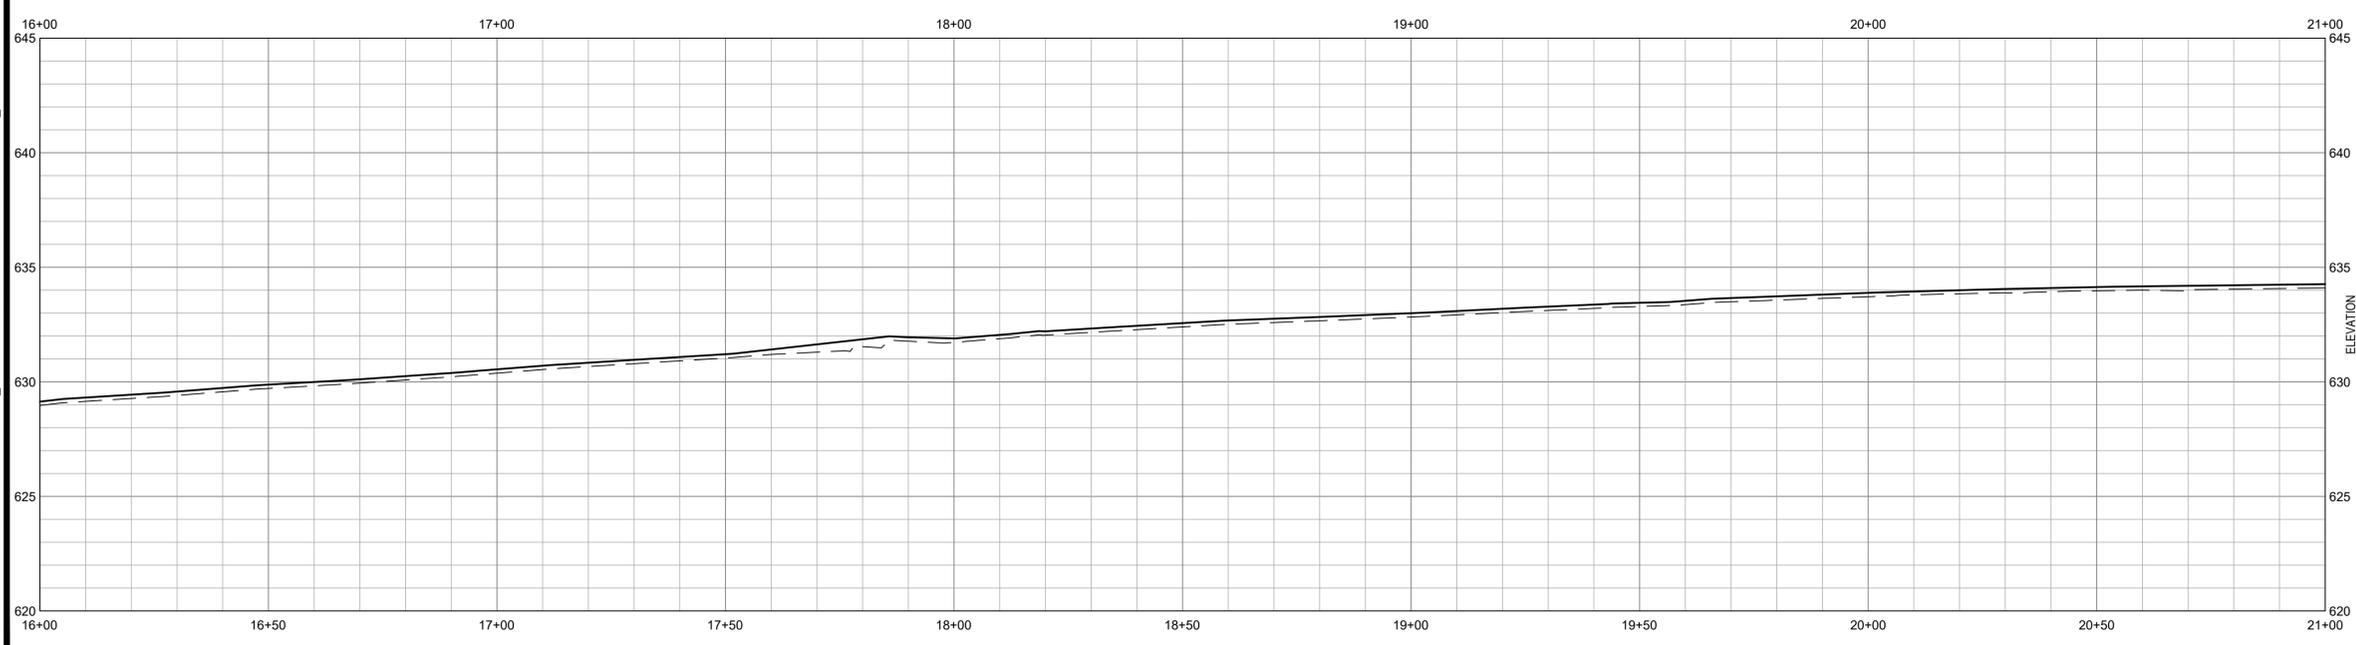

IMPROVEMENT PROFILE STATE STREET

SCALE: HORIZ 1"=20', VERT 1"=4'

SHEET GENERAL NOTES

- CONTRACTOR SHALL PERFORM ALL UNDERGROUND UTILITY WORK, CONCRETE WORK, SURFACE RESTORATION WORK, AND PERFORM ALL DIGOUT AND REPAIR WORK, SUCH AS PLACING LEVELING COURSE AND SEPARATION FABRIC, PRIOR TO FINAL HOT MIX PAVING.
- APPLY TACK COAT TO ALL ADJACENT (E) AC IMPROVEMENTS OR CONCRETE SURFACES AND AT JOINT BETWEEN (E) AND (N) IMPROVEMENTS.
- SEE SHEET G-004 FOR TYPICAL SECTIONS.
- SEE CURB RAMPS AND DRIVEWAYS ENLARGED PLANS FOR HORIZONTAL AND VERTICAL INFORMATION NOT SHOWN.

SHEET KEYNOTES

- INSTALL CURB AND GUTTER PER CITY STANDARD 102
- INSTALL SIDEWALK PER CITY STANDARD 102
- INSTALL DRIVEWAY APPROACH PER CITY STANDARD 102
- INSTALL BULBOUT PER CITY STANDARD 102
- INSTALL CURB RAMP PER CITY STANDARD 111
- INSTALL STREET MONUMENT PER CITY STANDARD 140

LOCATION OF EXISTING UTILITIES AND STRUCTURES ARE FROM AVAILABLE RECORD MAPS, EXACT LOCATION AND COMPLETENESS ARE NOT GUARANTEED. CONTRACTOR SHALL NOTIFY UNDERGROUND SERVICE ALERT (USA) AT (800) 227-2600 OR DIAL 811 A MINIMUM OF 48 HOURS PRIOR TO ANY EXCAVATION AND POTHOLE FOR EXACT LOCATION.

IDENTIFICATION STAMP
DIV. OF THE STATE ARCHITECT
APP. # 11191705 INC. #
REVIEWED FOR
SS FLS ACS
DATE:

GHD Inc.
2235 Mercury Way, Suite 150
San Jose, CA 95128 USA
T 1 707 523 1010 F 1 707 527 8679
W www.ghd.com



REUSE OF DOCUMENTS
This document and the ideas and designs incorporated herein, as an instrument of professional service, is the property of GHD and shall not be reused in whole or in part for any other project without GHD's written authorization.
© 2019 GHD

MARK	DATE	DESCRIPTION	ISSUE
	4-26-2019	90% SUBMITTAL	

**CITY OF UKIAH
UKIAH DOWNTOWN
STREETSCAPE
IMPROVEMENT PLAN
STA. 16+00 - STA. 21+00**

PROJ NO: 11191705
DRWN: CP CHKD: JS

C-104

SHEET 39 OF 105

2019-07-01 9:21 AM BYRBA
N:\US\Santa Rosa\Projects\561\11191705\Digital_Design\ACAD 2018\Sheets\Civil\11191705_C-101.DWG



REUSE OF DOCUMENTS
 This document and the ideas and designs incorporated herein, as an instrument of professional service, is the property of GHD and shall not be reused in whole or in part for any other project without GHD's written authorization.
 © 2019 GHD

MARK	DATE	DESCRIPTION	ISSUE
90% SUBMITTAL	4-26-2019		

**CITY OF UKIAH
 UKIAH DOWNTOWN
 STREETScape**
**IMPROVEMENT PLAN
 STA. 50+00 - STA. 54+00**


PROJ NO: 11191705
 DRWN: CP CHKD: JS

C-107

- ### SHEET GENERAL NOTES
- CONTRACTOR SHALL PERFORM ALL UNDERGROUND UTILITY WORK, CONCRETE WORK, SURFACE RESTORATION WORK, AND PERFORM ALL DIGOUT AND REPAIR WORK, SUCH AS PLACING LEVELING COURSE AND SEPARATION FABRIC, PRIOR TO FINAL HOT MIX PAVING.
 - APPLY TACK COAT TO ALL ADJACENT (E) AC IMPROVEMENTS OR CONCRETE SURFACES AND AT JOINT BETWEEN (E) AND (N) IMPROVEMENTS.
 - SEE SHEET G-004 FOR TYPICAL SECTIONS.
 - SEE CURB RAMPS AND DRIVEWAYS ENLARGED PLANS FOR HORIZONTAL AND VERTICAL INFORMATION NOT SHOWN.

- ### SHEET KEYNOTES
- INSTALL CURB AND GUTTER PER CITY STANDARD 102 (101 C-501)
 - INSTALL SIDEWALK PER CITY STANDARD 102 (101 C-501)
 - INSTALL DRIVEWAY APPROACH PER CITY STANDARD 102 (101 C-501)
 - INSTALL BULBOUT PER CITY STANDARD 102 (101 C-501)
 - INSTALL CURB RAMP PER CITY STANDARD 111 (111 C-501)
 - INSTALL STREET MONUMENT PER CITY STANDARD 140 (140 C-501)

LOCATION OF EXISTING UTILITIES AND STRUCTURES ARE FROM AVAILABLE RECORD MAPS, EXACT LOCATION AND COMPLETENESS ARE NOT GUARANTEED. CONTRACTOR SHALL NOTIFY UNDERGROUND SERVICE ALERT (USA) AT (800) 227-2600 OR DIAL 811 A MINIMUM OF 48 HOURS PRIOR TO ANY EXCAVATION AND POTHOLE FOR EXACT LOCATION.

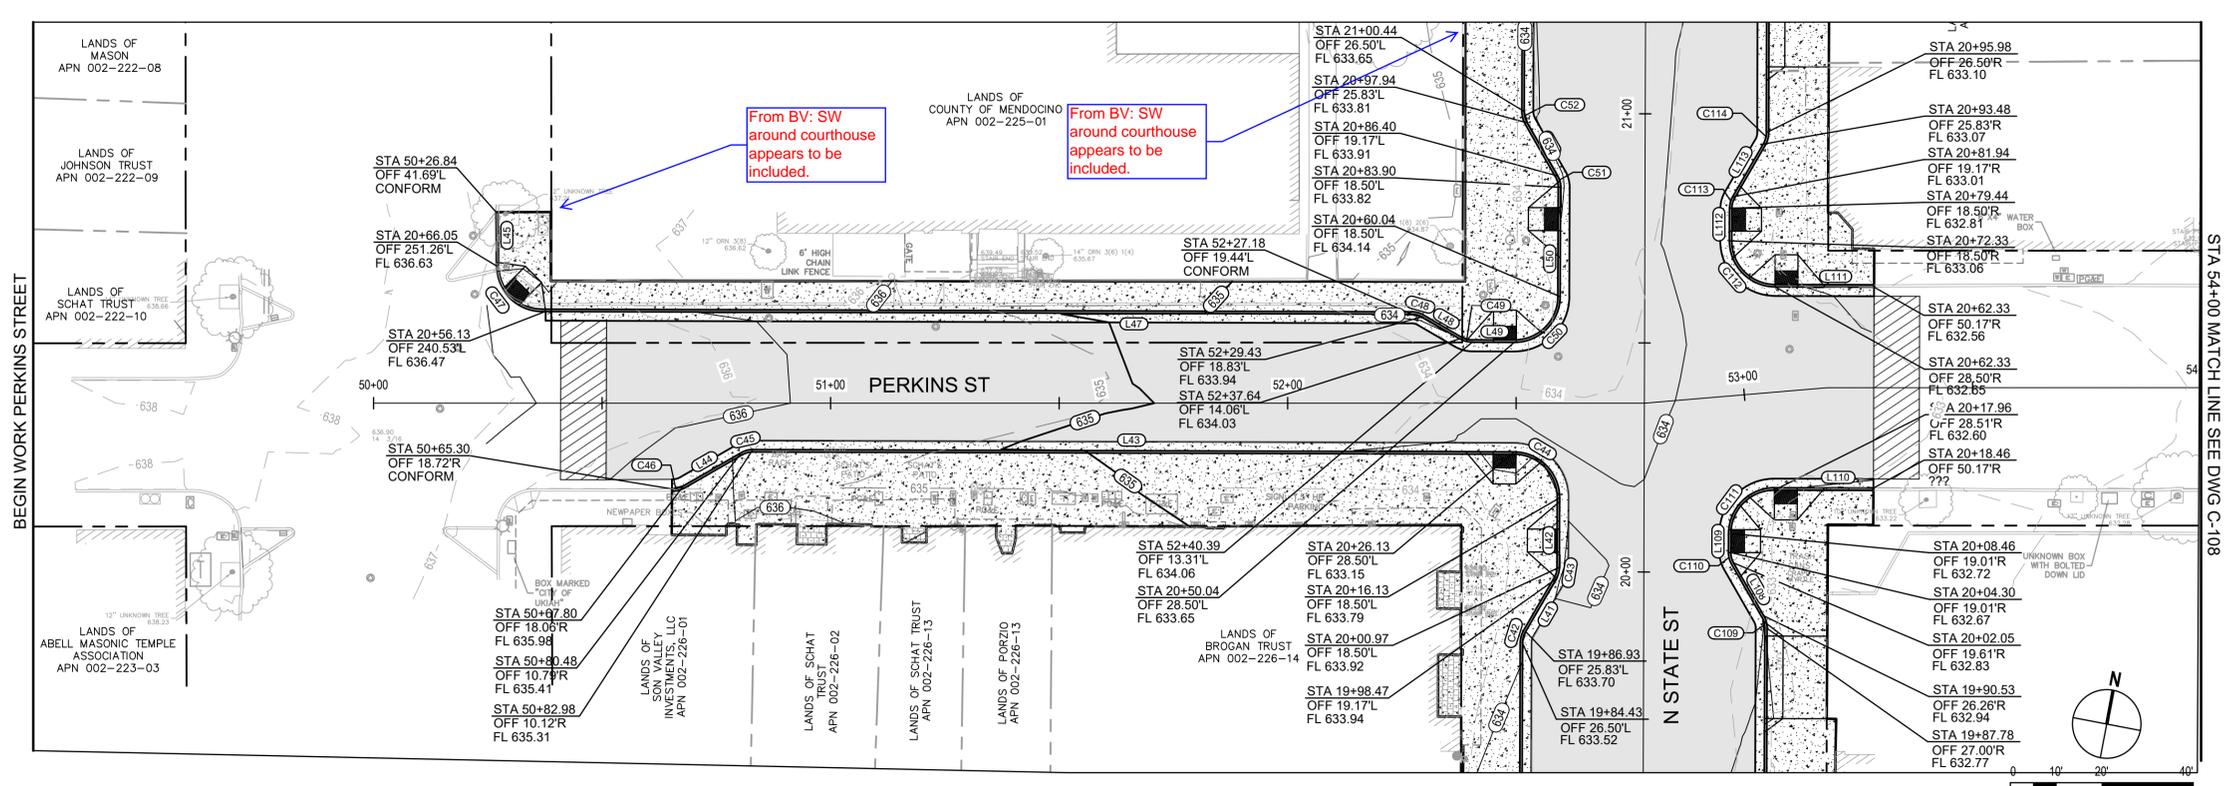

IMPROVEMENT PLAN PERKINS STREET

SCALE: 1" = 20'

CONSTRUCTION LEGEND

	HMA PAVEMENT
	CONCRETE CURB AND GUTTER, SIDEWALK, BULBOUTS, AND CURB RAMPS
	LANDSCAPING
	(N) OVERLAY TO (E) PAVEMENT CONFORM PER

LINE TABLE

LINE #	LENGTH	DIRECTION
L41	13.32	N19°22'30"E
L42	15.16	N10°37'24"W
L43	166.54	S79°22'36"W
L44	14.62	S49°22'30"W
L45	11.72	N11°04'01"W
L47	190.32	S79°22'36"W
L48	9.49	N70°37'30"W
L49	9.21	S79°22'36"W

LINE TABLE

LINE #	LENGTH	DIRECTION
L50	23.86	S10°37'24"E
L51	13.32	S40°37'30"E
L108	13.30	N40°37'30"W
L109	4.17	N10°37'30"W
L110	21.66	N79°22'36"E
L111	21.67	N79°22'36"E
L112	7.11	S10°37'24"E
L113	13.32	S19°22'30"W

CURVE TABLE


CURVE #	LENGTH	RADIUS	DELTA
C42	2.62	5.00	29°59'54"
C43	2.62	5.00	29°59'54"
C44	15.71	10.00	90°00'00"
C45	2.62	5.00	30°00'06"
C46	2.61	5.00	29°55'22"
C47	15.63	10.00	89°33'25"
C48	2.36	4.50	29°59'54"
C49	2.88	5.50	29°59'54"

CURVE TABLE

CURVE #	LENGTH	RADIUS	DELTA
C50	15.71	10.00	90°00'00"
C51	2.62	5.00	30°00'06"
C52	2.62	5.00	30°00'06"
C109	2.62	5.00	30°00'06"
C110	2.62	5.00	30°00'00"
C111	15.71	10.00	90°00'06"
C112	15.71	10.00	90°00'00"
C113	2.62	5.00	29°59'54"


CURVE TABLE

CURVE #	LENGTH	RADIUS	DELTA
C114	2.62	5.00	29°59'54"

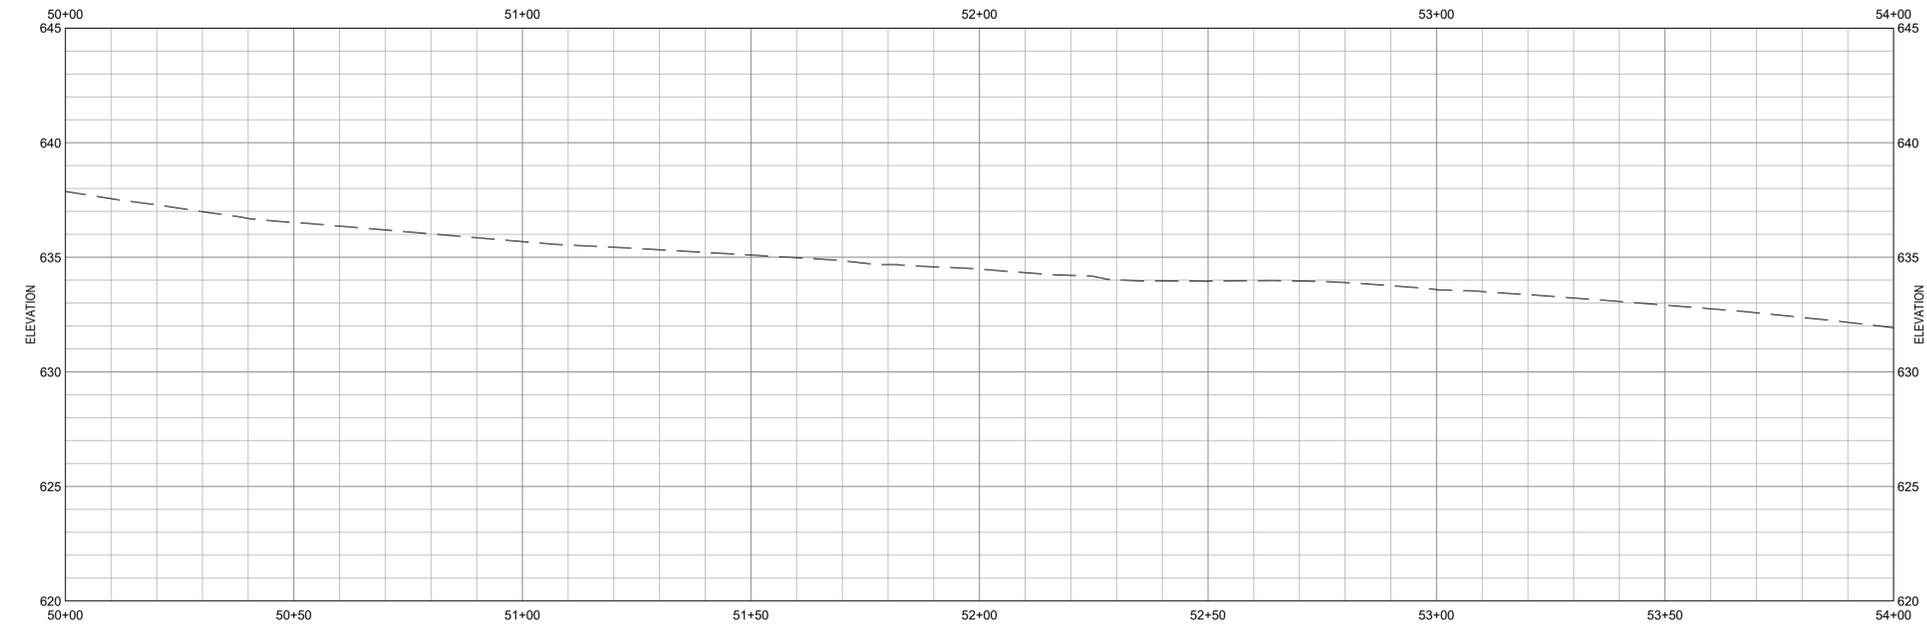

IMPROVEMENT PROFILE PERKINS STREET

SCALE: HORIZ 1"=20', VERT 1"=4'

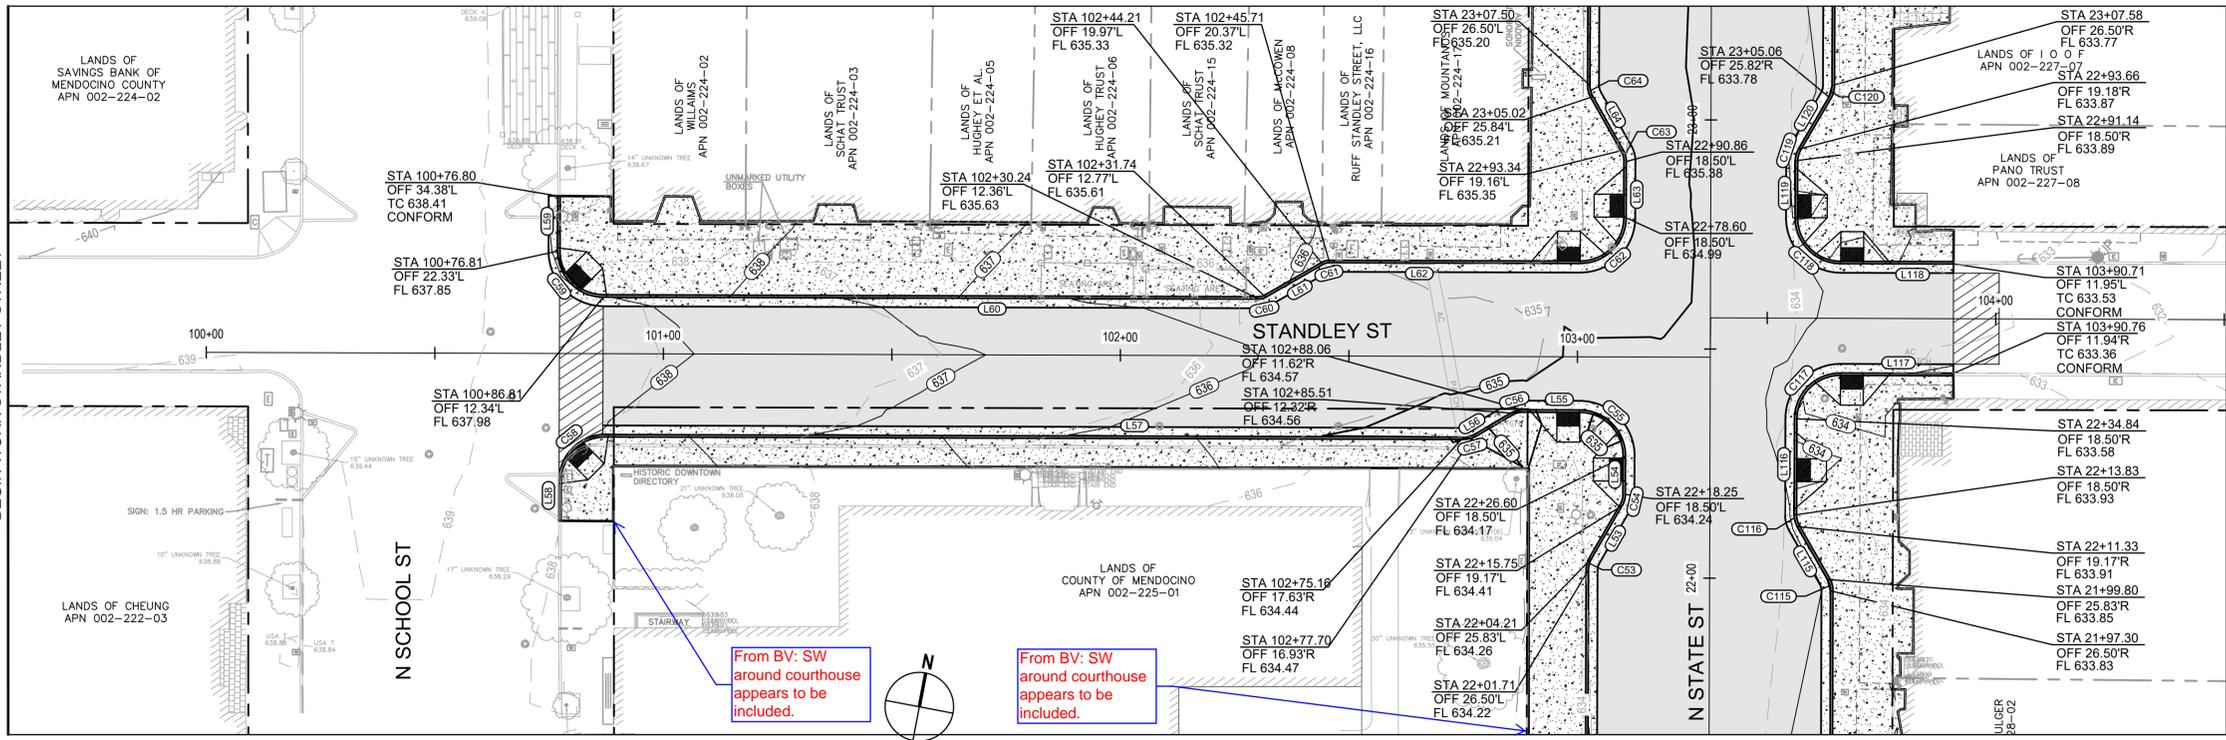

IMPROVEMENT PLAN STANDLEY STREET
SCALE: 1" = 20'

- SHEET GENERAL NOTES**
- CONTRACTOR SHALL PERFORM ALL UNDERGROUND UTILITY WORK, CONCRETE WORK, SURFACE RESTORATION WORK, AND PERFORM ALL DIGOUT AND REPAIR WORK, SUCH AS PLACING LEVELING COURSE AND SEPARATION FABRIC, PRIOR TO FINAL HOT MIX PAVING.
 - APPLY TACK COAT TO ALL ADJACENT (E) AC IMPROVEMENTS OR CONCRETE SURFACES AND AT JOINT BETWEEN (E) AND (N) IMPROVEMENTS.
 - SEE SHEET G-004 FOR TYPICAL SECTIONS.
 - SEE CURB RAMPS AND DRIVEWAYS ENLARGED PLANS FOR HORIZONTAL AND VERTICAL INFORMATION NOT SHOWN.

- SHEET KEYNOTES**
- INSTALL CURB AND GUTTER PER CITY STANDARD 102 (101 C-501)
 - INSTALL SIDEWALK PER CITY STANDARD 102 (101 C-501)
 - INSTALL DRIVEWAY APPROACH PER CITY STANDARD 102 (101 C-501)
 - INSTALL BULBOUT PER CITY STANDARD 102 (101 C-501)
 - INSTALL CURB RAMP PER CITY STANDARD 111 (111 C-501)
 - INSTALL STREET MONUMENT PER CITY STANDARD 140 (140 C-501)

CONSTRUCTION LEGEND

- HMA PAVEMENT
- CONCRETE CURB AND GUTTER, SIDEWALK, BULBOUTS, AND CURB RAMPS
- LANDSCAPING
- (N) OVERLAY TO (E) PAVEMENT CONFORM PER

LINE TABLE

LINE #	LENGTH	DIRECTION
L53	13.32	S19°22'30"W
L54	8.35	S10°37'24"E
L55	12.49	N79°22'36"E
L56	9.07	N48°49'19"E
L57	187.90	N79°22'30"E
L58	8.83	N10°42'29"W
L59	12.05	S10°37'30"E
L60	143.44	S79°22'30"W

LINE TABLE

LINE #	LENGTH	DIRECTION
L61	14.39	S49°22'30"W
L62	54.83	N79°22'36"E
L63	12.26	S10°37'24"E
L64	13.45	S40°24'10"E
L115	13.32	S40°37'30"E
L116	21.01	S10°37'24"E
L117	24.71	S79°22'36"W
L118	24.67	N79°22'36"E

LINE TABLE

LINE #	LENGTH	DIRECTION
L119	12.42	S10°37'24"E
L120	13.19	S19°35'50"W

CURVE TABLE

CURVE #	LENGTH	RADIUS	DELTA
C53	2.62	5.00	29°59'54"
C54	2.62	5.00	29°59'54"
C55	15.71	10.00	90°00'00"
C56	2.67	5.00	30°33'17"
C57	2.67	5.00	30°33'11"
C58	15.72	10.00	90°04'59"
C59	15.71	10.00	90°00'00"
C60	1.57	3.00	30°00'00"


CURVE TABLE

CURVE #	LENGTH	RADIUS	DELTA
C61	1.57	3.00	30°00'00"
C62	15.71	10.00	90°00'00"
C63	2.60	5.00	29°46'46"
C64	2.60	5.00	29°46'46"
C115	2.62	5.00	30°00'06"
C116	2.62	5.00	30°00'06"
C117	15.71	10.00	90°00'00"
C118	15.71	10.00	90°00'00"

CURVE TABLE

CURVE #	LENGTH	RADIUS	DELTA
C119	2.64	5.00	30°13'14"
C120	2.64	5.00	30°13'14"

LOCATION OF EXISTING UTILITIES AND STRUCTURES ARE FROM AVAILABLE RECORD MAPS, EXACT LOCATION AND COMPLETENESS ARE NOT GUARANTEED. CONTRACTOR SHALL NOTIFY UNDERGROUND SERVICE ALERT (USA) AT (800) 227-2600 OR DIAL 811 A MINIMUM OF 48 HOURS PRIOR TO ANY EXCAVATION AND POTHOLE FOR EXACT LOCATION.

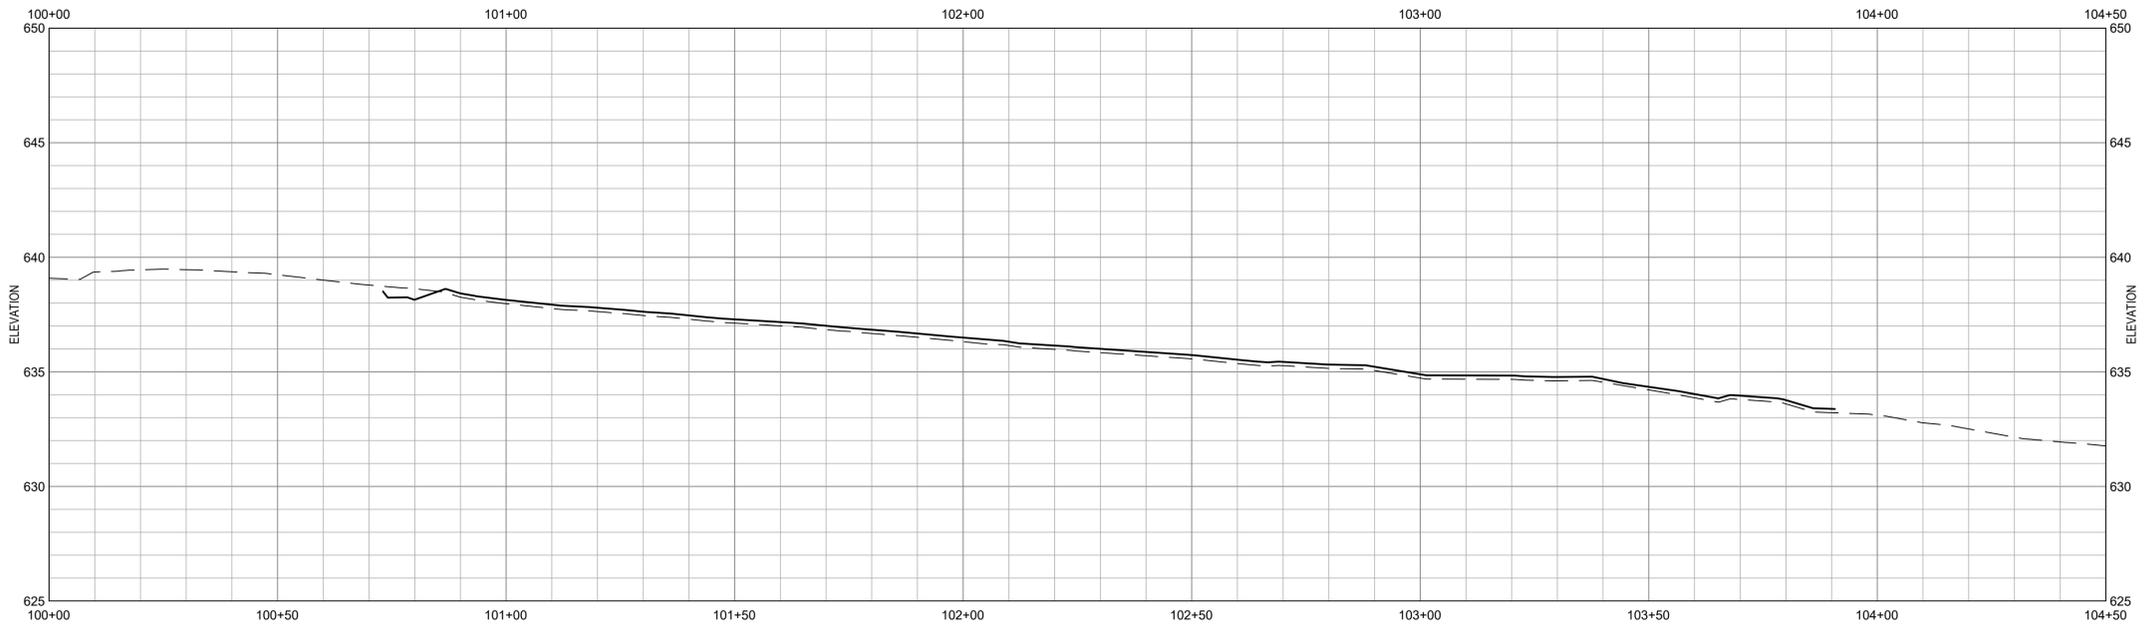

IMPROVEMENT PROFILE STANDLEY STREET
SCALE: HORIZ 1"=20', VERT 1"=4'

IDENTIFICATION STAMP
DIV. OF THE STATE ARCHITECT
APP. # 11191705 INC. #
REVIEWED FOR
SS FLS ACS
DATE:

GHD Inc.
2235 Mercury Way, Suite 150
Santa Rosa, CA 95407 USA
T 707 523 1010 F 707 527 8679
W www.ghd.com

REUSE OF DOCUMENTS
This document and the ideas and designs incorporated herein, as an instrument of professional service, is the property of GHD and shall not be reused in whole or in part for any other project without GHD's written authorization.
© 2019 GHD

MARK	DATE	DESCRIPTION	ISSUE
	4-26-2019	90% SUBMITTAL	

CITY OF UKIAH
UKIAH DOWNTOWN
STREETSCAPE
IMPROVEMENT PLAN
STA. 100+00 - STA. 104+50

PROJ NO: 11191705
DRWN: CP CHKD: JS

C-109

2019-07-01 9:22 AM BYRBA
N:\US\Santa Rosa\Projects\561\11191705\Digital_Design\ACAD 2018\Sheets\Civil\11191705_C-101.DWG